

TSR


**Full Steel Core Rope
Separate Lay (IWRC)
6 Strands
Zinc-Plated**



For high demands on small traction sheaves



Suitable for conical grooves of $\geq 45^\circ$
Recommended for conical grooves and undercut round grooves

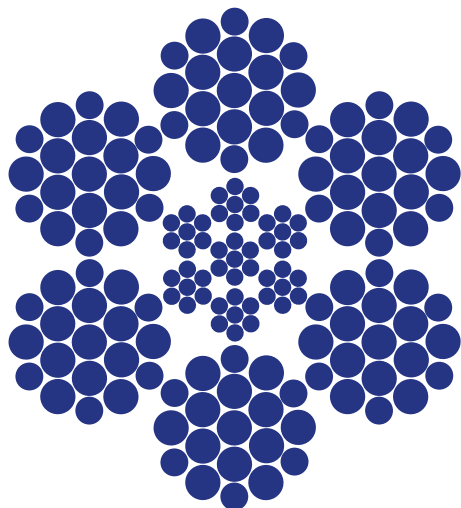

Elastic elongation	Permanent elongation	Lifting height*
0,102%	0,120%	≤ 75 m ≤ 250 ft

item number	rope \varnothing		breaking load min.		weight		construction
	mm	in	kN	lbs	kg/100m	lb/ft	
64496	6.7	-	31.3	7037,00	20.00	0,134	6x19W-IWRC 1960 B sZ (RRL)

Further nominal strengths and/or diameters (including imperial dimensions) on request. Rope diameter-tolerances according to EN12385-5 / ISO 4344.

* The defined lifting height is based on an elevator with a 1:1 suspension and is only indicative. It does not replace the exact calculation according to the system specifications.